


Product Catalogue

Anemometers & Weather Stations



About Gill

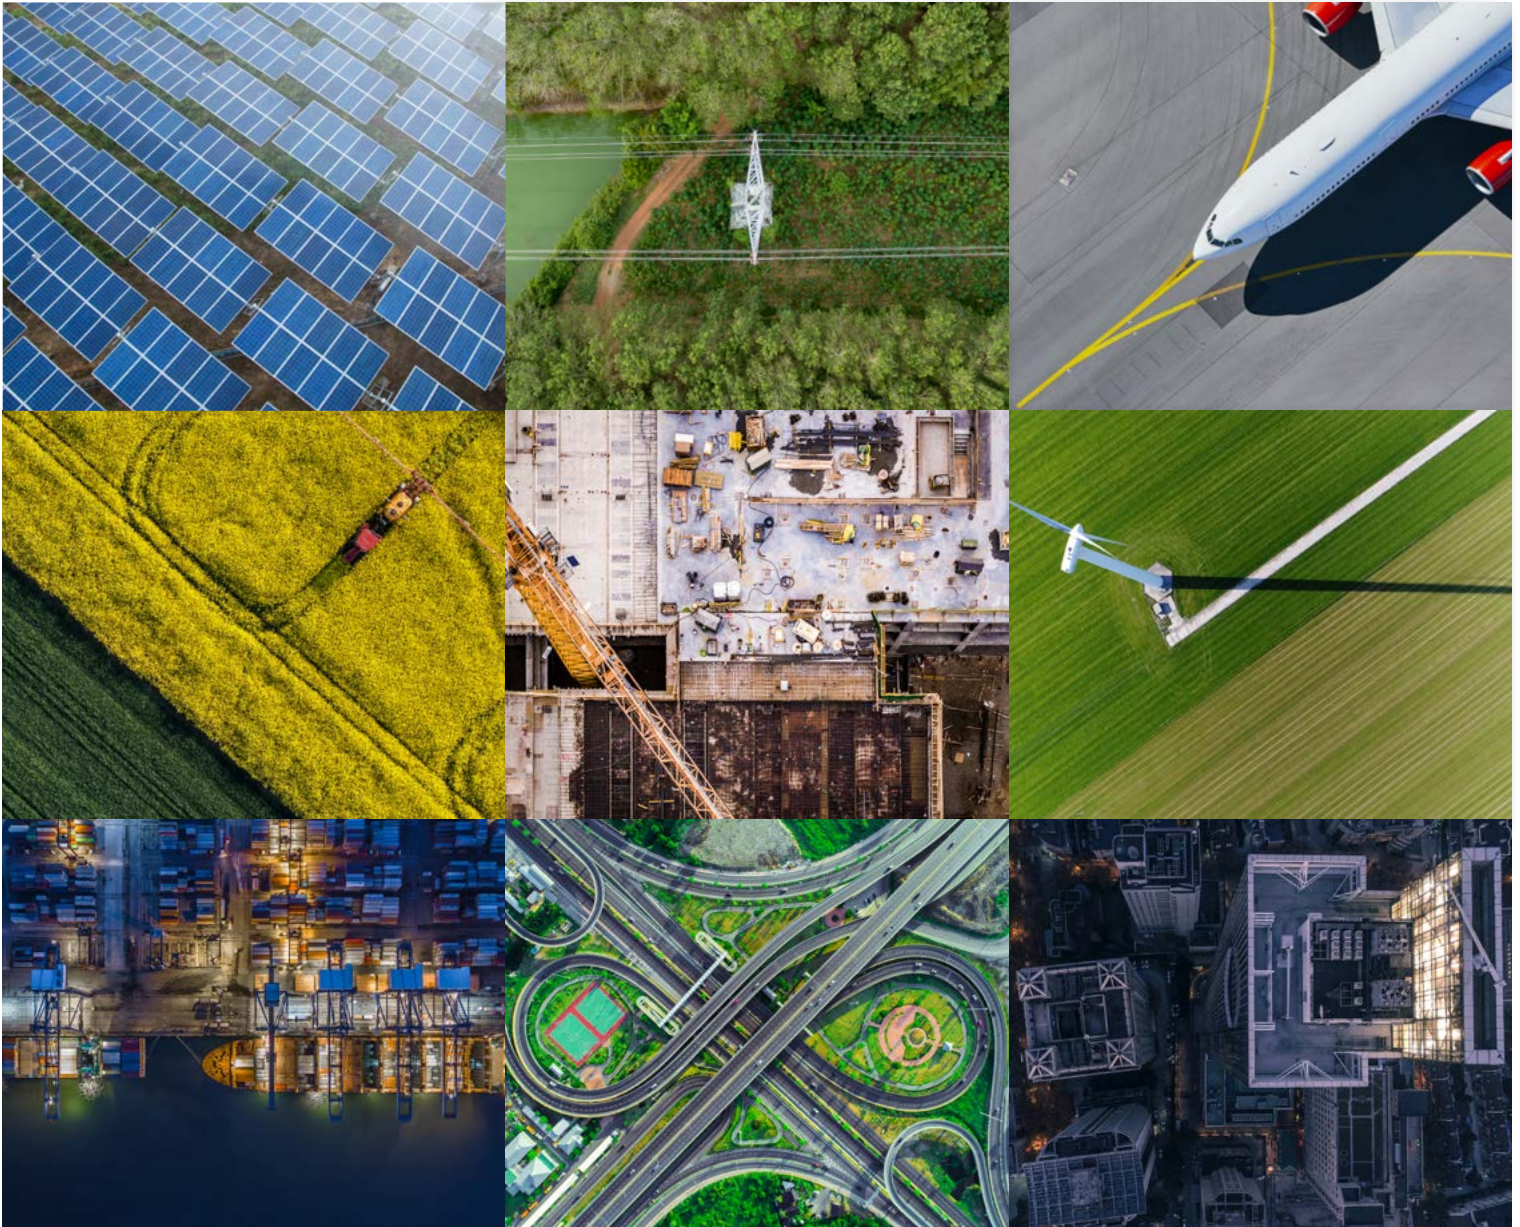

About Gill

Gill Instruments was founded in 1988 to develop ultrasonic anemometers for the meteorological and commercial measurement markets. The company is 100% owned by the Gill family with product design, manufacture and support services located within the UK.

Our Customers

Gill serve a range of customers around the world ranging from some of the most innovative global research programmes and many of the largest defence forces to a broad range of commercial and industrial partners.

Customer relationships are key to the company's success and a number of customers, integrators and distributors have been working with Gill Instruments for over 25 years.

Our Products

Our products are designed to operate effectively in challenging environments and in applications where the highest reliability is required. Products have been approved to Lloyds Register, ATEX, and FAA standards.

Research and product innovation remain at the core of Gill's philosophy and over 20% of sales are invested in research and development. This ensures that the products continue to support the market's ongoing demand for high quality, reliable products.

MaxiMet[®]

Page 4-5



Compact, integrated weather stations

MetConnect

Page 6



Flexible, multi-parameter weather stations

Weather Station Applications

Page 7

WindSonic

Page 8



Lightweight, compact anemometers

WindObserver

Page 9-10



Robust internationally certified anemometers

Anemometer Applications

Page 11

WindMaster

Page 12



3D anemometers for meteorological and industrial applications

Research

Page 13



3D anemometers for scientific research

Additional Services & Accessories

Page 14

MaxiMet®

Compact, integrated weather stations



MaxiMet is a compact, integrated commercial weather station with multiple measurement parameters and output protocols designed to provide insight in a wide range of commercial and industrial applications. MaxiMet offers a variety of configurations to enable the user to specify the parameters required for their specific application.



MaxiMet® GMX200

Wind
Compass
GPS (option)



MaxiMet® GMX500

Wind	Compass
Temperature	GPS (option)
Humidity	
Pressure	



MaxiMet® GMX600

Wind	Compass
Temperature	Precipitation
Humidity	GPS (option)
Pressure	

MaxiMet®

Compact, integrated weather stations



MaxiMet® GMX240

Wind
Precipitation
Compass
GPS (option)



MaxiMet® GMX300

Temperature
Humidity
Pressure



MaxiMet® GMX301

Temperature
Humidity
Pressure
Solar radiation



MaxiMet® GMX400

Temperature
Humidity
Pressure
Precipitation



MaxiMet® GMX501

Wind	Compass
Temperature	Solar radiation
Humidity	GPS (option)
Pressure	



MaxiMet® GMX550

Wind	Compass
Temperature	Remote rain sensor input
Humidity	GPS (option)
Pressure	
Precipitation	



MaxiMet® GMX551

Wind	Solar radiation
Temperature	Compass
Humidity	Remote rain sensor input
Pressure	
Precipitation	GPS (option)

MetConnect

Flexible, multi-parameter weather stations



MetConnect is a flexible, professional multi-parameter weather station which features wind speed and direction, temperature, relative humidity and pressure measurements. MetConnect can combine up to four further sensors or systems with additional analogue, PRT and rain gauge inputs.



MetConnect THP

Temperature

Humidity

Pressure

1 Gill anemometer input

2 analogue inputs (0-5V or 4-20mA)

1 PRT input

1 rain gauge input



MetConnect ONE

Temperature

Humidity

Pressure

Wind

2 analogue inputs (0-5V or 4-20mA)

1 PRT input

1 rain gauge input

Weather station applications

Smart buildings

As energy efficiency and low carbon impact gain importance, buildings have been designed to be smarter and react to the weather. MaxiMet has been integrated into a range of building control systems to provide the environmental data needed to drive decisions such as increasing ventilation or activating window shades.



Agriculture

With an increasing focus on efficiency and environmental concerns, the agricultural industry has looked to achieve a better understanding of the soil and weather conditions. MetConnect has been deployed to measure rainfall, temperature and humidity, and collect additional inputs from sensors measuring parameters such as soil moisture.



Solar farm monitoring

Solar power generation is a fast growing industry and the efficiency and safety of solar panels is essential to owners. Gill weather stations have proven to be effective sensors for the industry, combining measurement of solar radiation and back of panel temperature to monitor panel efficiency, rainfall to monitor panel cleanliness and wind to ensure panel safety.



WindSonic

Lightweight, compact anemometers



The WindSonic range of commercial anemometers can measure wind speed or air flow up to 75m/s. The WindSonic range is available in polycarbonate construction for indoor or normal outdoor use. The WindSonic M is constructed from aluminium and is available with optional heating for more challenging environments.



WindSonic

Max wind speed	60m/s (216km/h)
Construction	Luran
Operational temp	-35° to +70°C
Weight	0.5kg (18oz)
Heating option	No
Analogue option	0-5V, 0-20mA or 4-20mA
Environmental	IP66

WindSonic75

Max wind speed	75m/s (270km/h)
Construction	Luran
Operational temp	-35° to +70°C
Weight	0.5kg (18oz)
Heating option	No
Analogue option	0-5V, 0-20mA or 4-20mA
Environmental	IP66

WindSonicM

Max wind speed	60m/s (216km/h)
Construction	Aluminium
Operational temp	-40° to +70°C
Weight	0.9kg (32oz)
Heating option	Yes
Analogue option	0-5V, 0-20mA or 4-20mA
Environmental	IP66, impact resistant to UL2218 Class 1

WindObserver

Robust internationally certified anemometers



The WindObserver range of professional anemometers is approved for use in the marine and aviation markets. WindObservers are able to measure wind speeds up to 90m/s. The stainless steel construction and optional heating capability enable operation in the most challenging environments. The WindObserver IS is approved for applications where Intrinsically Safe certification is required.



*Anemometer only

WindObserver65

Wind Speed range	65m/s (234km/h)
Operational temp	-55° to +70°C
Weight	1.4kg (50oz)
Heating option	Yes
Environmental	IP66
Analogue option	±2.5V, 0-5V or 4-20mA

WindObserver70

Wind speed range	70m/s (252km/h)
Operational temp	-55° to +70°C
Weight	1.4kg (50oz)
Heating option	Yes
Environmental	IP66

WindObserverIS

Wind speed range	75m/s (270km/h)
Operational temp	-30° to +70°C*
Weight	1.9kg (67oz)
Heating option	None
Environmental	IP66

WindObserver

Robust internationally certified anemometers



For wind speeds above 70m/s the range includes the WindObserver 75 and WindObserver 90. Both products are available with an enhanced heating option that ensures continued operation in low temperature, high wind speed environments.



WindObserver75

Wind speed range	75m/s (270km/h)
Operational temp	-55° to +70°C
Weight	1.4kg (50oz)
Heating option	Yes
Environmental	IP66

WindObserver90

Wind speed range	90m/s (324km/h)
Operational temp	-55° to +70°C
Weight	1.4kg (50oz)
Heating option	Yes
Environmental	IP66

Anemometer applications

Tunnel monitoring

Air flow in road and rail tunnels has to be closely monitored to ensure that exhaust gases do not build up. Gill supply the WindSonic to a range of ventilation system integrators for use in their solutions. Systems have been deployed in tunnels in Europe, America and Asia, providing safe journeys for road, rail and metro passengers.



Marine weather

Measurement of marine weather ensures safe passage for ships and aids global weather forecasting. WindSonic anemometers have been extensively deployed on coastal safety and ocean observatory buoys for many years. WindObserver products are integrated into a wide range of navigation and dynamic positioning systems.



Aircraft take off and landing

Accurate monitoring of wind speed and direction is essential for the safe take-off and landing of all aircraft. The WindObserver range is trusted to provide this vital information by organisations around the world including major airports in the UK and worldwide, a range of European and NATO defence forces and many oil and gas rig operators.



WindMaster

3D anemometers for meteorological and industrial applications



The WindMaster range of professional ultrasonic anemometers is capable of measuring wind speed or air flows up to 65m/s in three dimensions. WindMasters are available in stainless steel or lightweight aluminium/carbon fibre construction. The range is extensively used for commercial development projects to support high value investment and performance decisions.



WindMaster

Wind speed range	50m/s (180km/h)
Construction	Aluminium and carbon fibre
Operational temp	-40° to +70°C
Weight	1.0kg (35oz)
Output rate	20Hz
Analogue inputs	4 single ended or 2 differential

WindMasterPro

Wind speed range	65m/s (234km/h)
Construction	Stainless steel
Operational temp	-40° to +70°C
Weight	1.7kg (60oz)
Output rate	32Hz
Analogue inputs	4 single ended or 2 differential, plus PRT 100 input

WindMasterRA

Wind speed range	50m/s (180km/h)
Construction	Aluminium and carbon fibre
Operational temp	-40° to +70°C
Weight	1.0kg (35oz)
Output rate	20Hz
Analogue inputs	4 single ended or 2 differential

Research

3D anemometers for scientific research studies



The Research range of anemometers is optimised for scientific studies. The range offers measurements at 50Hz and 100Hz, provides U, V, W vector outputs as well as sonic temperature and speed of sound. The range is specifically designed for research projects including fine scale eddy covariance or trace gas dispersion analysis studies.



R3-50

Wind speed range	45m/s (162km/h)
Construction	Aluminium and carbon fibre
Operational temp	-40° to +60°C
Weight	1.0kg (35oz)
Output rate	50Hz
Analogue inputs	6 differential inputs



R3-100

Wind speed range	45m/s (162km/h)
Construction	Aluminium and carbon fibre
Operational temp	-40° to +60°C
Weight	1.0kg (35oz)
Output rate	100Hz
Analogue inputs	6 differential inputs



HS-50

Wind speed range	45m/s (162km/h)
Construction	Stainless steel
Operational temp	-40° to +60°C
Weight	2.5kg (88oz)
Output rate	50Hz (100Hz option)
Analogue inputs	6 differential inputs

HS-100

Additional services & accessories

Calibration

For applications where individual calibration or independent certification is required, Gill offers a calibration service. This service provides a range of options from a single wind direction, single speed calibration traceable to national standards, to a multi speed full rotate calibration service undertaken by a UKAS accredited calibration service.



Software

Gill products are supported by complementary software, such as MetSet and MetView. MetSet software allow the sensor including the data output to be configured. MetView software allows the measurements taken by the sensor to be viewed.

Accessories

Gill offers a range of accessories for each product range to enable the products to be used quickly and easily. These include connection, mounting, measurement and configuration accessories.





For more information on our products and services please visit www.gillinstruments.com

+44 (0) 1590 613500

contact@gillinstruments.com

Gill Instruments Limited

Saltmarsh Park
67 Gosport Street
Lymington
Hampshire
SO41 9EG
UK

gillinstruments.com

+44 (0) 1590 613500

contact@gillinstruments.com