

GMX552 Compact Weather Station

High quality, easy-to-use, integrated weather station for heat stress monitoring

MaxiMet compact weather stations are designed to be simple to install, use and maintain. In addition to providing measured parameters, the products derive additional parameters and data is output as a single string and available on a range of communications protocols.

MaxiMet weather stations benefit from the same technology used in Gill's scientific product range, ensuring measurement accuracy, low maintenance and continuous status reporting.

The MaxiMet family includes a range of sensor configurations allowing customers to select the model most appropriate to their needs.

Typical applications

- Construction sites and other harsh working conditions.
- Sports events.
- Control systems for manufacturing, agriculture and industry.
- Reporting systems for transport and safety.
- Low power/solar powered deployments and IoT applications.

MaxiMet GMX552 key features

- Six measured parameters:
Black globe temperature, wind speed & direction, temperature, humidity, pressure, optional GPS function.
- Outputs WBGT in accordance with ISO 7243:2017 (up to 70°C).
- Multiple additional derived parameters.
- Wet bulb sensor can be added for increased accuracy.
- High quality, accurate, solid state sensors.
- 2-axis compass.
- Optional integrated GPS capability available to provide location, GPS timestamp and a calculation of true wind if the platform is moving.

Benefits

- Early identification of dangerous working conditions increases worker welfare, reduces risk of sickness and supports long-term productivity.
- High quality measurement data due to careful sensor selection and extensive design testing and verification.
- Easy to set-up and integrate using comprehensive software to select the reported and derived parameters and measurement units required.
- Easy to install and long operational life, due to a compact, robust design and the selection of low maintenance sensors.
- Suitable for use with battery or solar systems in low power mode.



MaxiMet GMX552 measures 6 parameters.



Heat stress monitoring in extreme environmental conditions is essential for worker safety and operational efficiency.

GMX552 Compact Weather Station

High quality, easy-to-use, integrated weather station for heat stress monitoring

WIND SPEED	
Range	0-60 m/s
Accuracy	0-10 m/s 0.3 m/s RMSE 10-40 m/s 3% RMSE 40-60 m/s 5% RMSE
Resolution	0.01 m/s
Starting threshold	0.01 m/s
Units of measurement	m/s, km/h, mph, kts, ft/min

WIND DIRECTION	
Range	0-360°
Accuracy	0.5 m/s-40 m/s ±3° 40-60 m/s ±5°
Resolution	1°
Units of measurement	degrees

BLACK GLOBE TEMPERATURE SENSOR	
Range	-35°C to +70°C
Accuracy	±0.5°C
Resolution	0.1°C
Units	°C (default), °F, K

AIR TEMPERATURE	
Range	-35°C to +70°C
Accuracy	±0.3°C
Resolution	0.1°C
Units of measurement	°C, °F, K

RELATIVE HUMIDITY	
Range	0-100% RH
Accuracy	typically ±2% RH across full range
Resolution	0.1% RH
Units of measurement	% RH, g/m³

BAROMETRIC PRESSURE	
Range	300-1250 hPa
Accuracy	Absolute (typically) ±0.4 hPa 900-1100 hPa, 25-40°C Relative (typically) ±0.08 hPa
Resolution	0.1 hPa
Units of measurement	hPa, mbar, mmHg, inHg

WARRANTY	
Warranty	24 months

OUTPUTS	
Digital comms modes	RS232, RS422 RS485, SDI-12,
Protocols	ASCII, SDI-12 v1.3, NMEA 0183 MODBUS (RTU and ASCII)
Data outputs rates	1/s, 1/min, 1/hour, or polled

POWER SUPPLY	
Input voltage	5-30 VDC
Average current consumption @ 12 VDC	26 mA continuous mode (std unit) +9 mA with GPS option 1.3 mA eco-power mode (no GPS, 1/hr)

MECHANICAL	
Construction	UV stabilized thermoplastic
Fittings	Fit to 44.45 mm (1.75 in) pole or mast
Weight	1.29 kg
Connector type	9-way clipper connector


ENVIRONMENTAL	
Protection class	IP66
Operating temp.	-35°C to +70°C
Storage temp	-40°C to +70°C

STANDARD EQUIPMENT (supplied with product)	
MaxiMet product	
Mating connector	
MetSet software*, to set-up and configure MaxiMet (comms mode, measurement units, reporting intervals, derived parameters, etc.)	
MetView software*, to view reported parameters	
MaxiMet User Manual*	
* downloadable from Gill Instruments website	

OPTIONS	
GPS	Available as an option. Enables reporting of location, height, real time clock, true wind (for vehicle mounting applications)
Wet bulb sensor	Available as an accessory to offer increased WBGT output accuracy.

GMX552 Compact Weather Station

High quality, easy-to-use, integrated weather station for heat stress monitoring

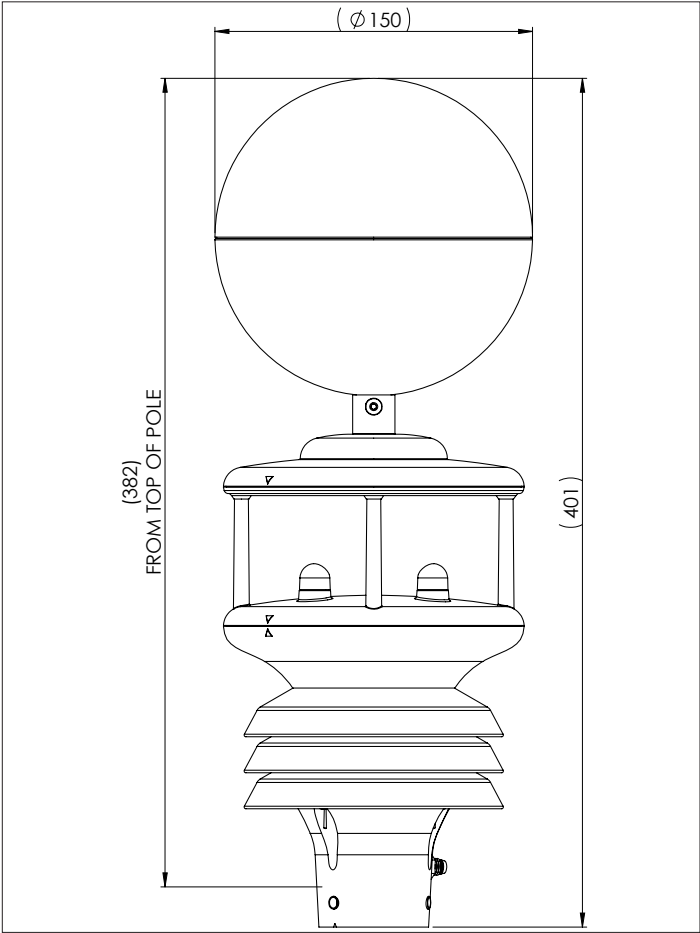

EXAMPLE DERIVED PARAMETERS FOR MAXIMET RANGE (model dependent) A full list of derived parameters is available in the User Manual, downloadable from gillinstruments.com	
Average wind speed *	Sunrise
Average wind direction *	Solar noon
Corrected wind speed	Twilight
Corrected wind direction	Sunset
Gust wind speed & direction *	Position of sun
Dew point	Angle of tilt
Wind chill	Pressure at sea level
Absolute humidity	Heat index
* WMO compliant	

ACCESSORIES

A list of the accessories available to support MaxiMet is provided on the MaxiMet Accessories Datasheet, which can be downloaded from gillinstruments.com

MaxiMet® Compact Weather Stations

Robust, high quality compact, integrated weather stations

MaxiMet weather stations are supported by a range of accessories. These accessories can be used to correct, install and maintain MaxiMet. The accessories have been designed to increase the long term performance of MaxiMet products.

Accessories	Accessories
1. MaxiMet weather station	1. MaxiMet weather station
2. MaxiMet weather station	2. MaxiMet weather station
3. MaxiMet weather station	3. MaxiMet weather station
4. MaxiMet weather station	4. MaxiMet weather station
5. MaxiMet weather station	5. MaxiMet weather station
6. MaxiMet weather station	6. MaxiMet weather station
7. MaxiMet weather station	7. MaxiMet weather station
8. MaxiMet weather station	8. MaxiMet weather station
9. MaxiMet weather station	9. MaxiMet weather station
10. MaxiMet weather station	10. MaxiMet weather station
11. MaxiMet weather station	11. MaxiMet weather station
12. MaxiMet weather station	12. MaxiMet weather station
13. MaxiMet weather station	13. MaxiMet weather station
14. MaxiMet weather station	14. MaxiMet weather station
15. MaxiMet weather station	15. MaxiMet weather station
16. MaxiMet weather station	16. MaxiMet weather station
17. MaxiMet weather station	17. MaxiMet weather station
18. MaxiMet weather station	18. MaxiMet weather station
19. MaxiMet weather station	19. MaxiMet weather station
20. MaxiMet weather station	20. MaxiMet weather station

Accessory Descriptions

- Connectors (1957-10400)**
A replacement connector is available if required. The connector is compatible with all MaxiMet models and is supplied with pins.
- Cables for operational use**
The 4-pin cable can be used to connect MaxiMet to power and communication. The cable can be supplied as a 1m cable with pins (1957-10400), or by the metre (1957-10401).
- Cable for setup configuration (1957-10402)**
The cable can be used to connect MaxiMet to a USB port on a computer. Using MaxiMet, the setup of the MaxiMet unit can be undertaken via a computer. The cable is 1.5m long and requires a USB to MaxiMet connector on one end and a USB connector on the other end.

gillinstruments.com

© Gill Instruments Limited



OTHER MAXIMET MODELS						
	Wind	Temperature, humidity, pressure	Rain	Solar	Compass, GPS	Low power heating
GMX200	Y				Y, as option	
GMX240	Y		Integrated optical rain sensor		Y, as option	
GMX260	Y				Y 6-axis, option	
GMX300		Y				
GMX301		Y		Y		
GMX400		Y	Integrated optical rain sensor			
GMX500	Y	Y			Y, as option	Option
GMX501	Y	Y		Y	Y, as option	Option
GMX550	Y	Y	Tipping bucket connector		Y, as option	Option
GMX551	Y	Y	Tipping bucket connector	Y	Y, as option	Option
GMX560	Y	Y			Y 6-axis, option	Option
GMX600	Y	Y	Integrated optical rain sensor		Y, as option	Option

For more information about MaxiMet®, please contact Gill Instruments.
Designed and manufactured in the UK by Gill Instruments Limited.