



GILL

WINDOBSERVER 75

Robust ultrasonic wind sensors for challenging environments

PRODUCT OVERVIEW

The WindObserver 75 has been developed for measuring higher wind speeds in extreme weather environments featuring 150 Watts of electrical heating power in the anemometer head. This anemometer has been designed to remain ice free in most freezing weather conditions.

Constructed from Stainless steel this anemometer meets the stringent performance criteria specified by wind turbine manufacturers, airports, marine, oil and gas production, and meteorological organisations around the world.

KEY FEATURES & BENEFITS

- 01** Wind speed accuracy for turbine control $\pm 1\%$ within $\pm 25^\circ$ of datum
- 02** Heating power 7A @ 24VAC or DC (1W/cm²)
- 03** 0-75m/s wind speed range
- 04** 0-360° wind direction range (no dead band)
- 05** Calibration traceable to national standards
- 06** IP66 rated stainless steel construction
- 07** Connector, cable exit and base mount options
- 08** Averaging/gusts to WMO guidelines

TYPICAL APPLICATIONS

- Building controls & structural safety
- High altitude mountainous regions
- Artic/Antartic weather monitoring
- Marine vessels dynamic systems
- Wind turbine control
- Road & rail tunnels
- Transport safety
- Ports & harbours
- Aircraft landing safety

With innovative transducer design, this anemometer boasts a very high wind speed range of 0 - 75 m/s (0-168mph)



WINDOBSERVER 75

Robust ultrasonic wind sensors for challenging environments

TECHNICAL SPECIFICATION

Wind Speed

Range	0 - 75 m/s (0-168mph)
Accuracy	<2% RMSE @ 12m/s (1% for turbine control)
Resolution	0.01 m/s
Starting threshold	0.01 m/s
Offset	±0.01 m/s

Wind Direction

Range	0 - 360°
Accuracy	<2° RMSE @ 12m/s (1° for turbine control)
Resolution	1°
Dead band direction	none

Measurement

Digital output rate	1 - 4Hz
Parameters	UV, Polar, NMEA
Units	m/s, knots, mph, kph, ft/min
Average (selectable)	Rolling average - 1, 2, 10 m.n, Gust - 3s
Block average	0-3600s

Digital output

Communication	RS422/RS485 full duplex/ half duplex
Baud rates temperature	1200, 2400, 4800, 9600, 19200, 38400
Formats	8 bit data; odd, even or no parity Modbus RTU
Anemometer status	Supplied as part of standard message

Operational

Site calibration	None required. Integrity check unit (Zero wind) supplied as optional extra(Zero wind)
Factory calibration	Traceable to National Standards

WindObserver



Power requirement

Anemometer only	9 - 30 VDC (60mA max, 50mA average)
Heating	Max 7A @24 VAC or DC

Mechanical

External construction	Stainless steel 316
Size	Refer to diagram overleaf
Weight	1.7kg (with 2m cable) 1.3kg (with connector)

Environmental

Protection class	IP66 (NEMA4X)
Humidity	0% to 100% RH
Operating temperature	-55°C to +70°C (with heating)
Precipitation	300mm/hr
EMC	EN61326-1: 2013 , EN60945:2002
Icing	MILSTD810F Method 521.2 Procedure I

Approvals

Approvals	Llyods register type approval
-----------	-------------------------------



Accessories

Pipe mount	Contact Gill
Software	WindView software for displaying data*

* Download software free from gillinstruments.com

WINDOBSERVER 75

Robust ultrasonic wind sensors for
challenging environments

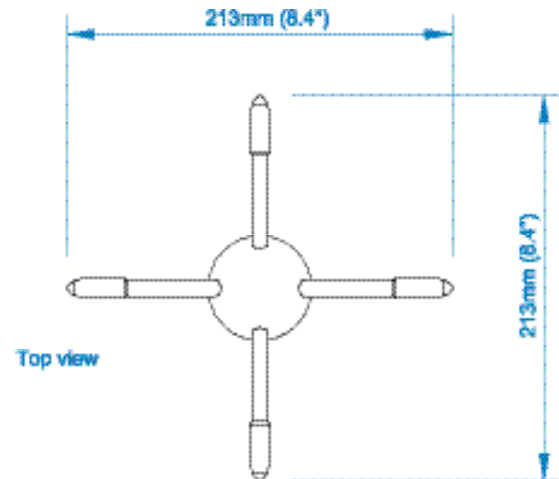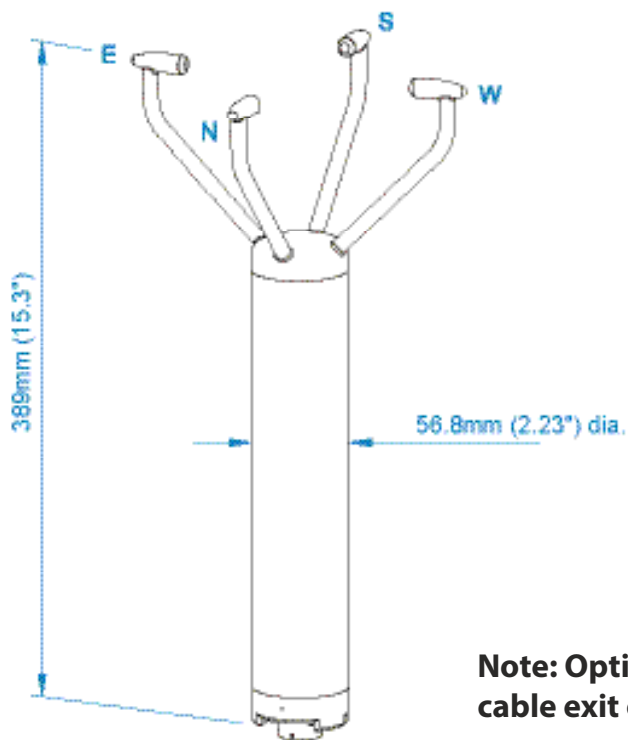


**Note: Optional base mounts and
cable exit options are available.**

Designed and manufactured in the UK by
Gill Instruments Limited. Specifications may be subject to change without
prior notice.

WINDOBSERVER 75

Robust ultrasonic wind sensors for challenging environments

WindObserver product numbers explained

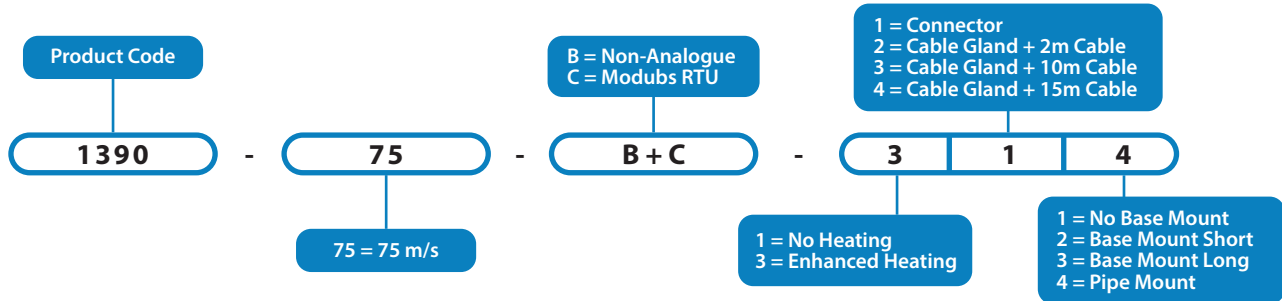

Connection options

Drawings below shown without base mounts

WindObserver fitted with cable gland and flying lead

WindObserver fitted with integral connector


Gasket (supplied)

Cable length options
2m, 10m & 15m


150 mm (5.9") fios longos

Base & Pipe mount options


Base mount support

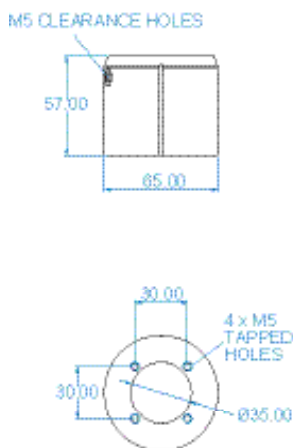

Base mount long

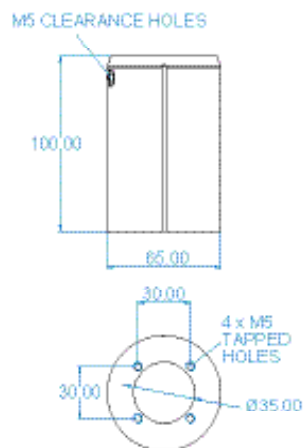

Pipe mount

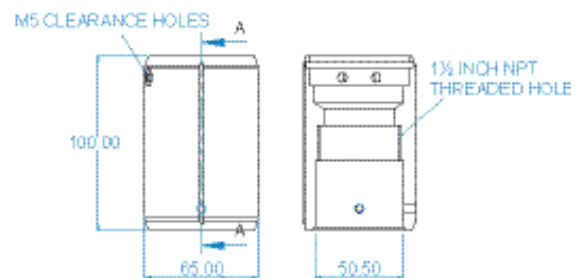

All options are supplied with appropriate fixing screws and washers.

Designed and manufactured in the UK by
Gill Instruments Limited. Specifications may be subject to change without prior notice.

GILL

1390-0034 Issue 11
© 2026 Gill Instruments
gillinstruments.com

MORE INFO

For more information about Gill's WindObserver range, please email contact.gi@gill.group